

FIG. 1

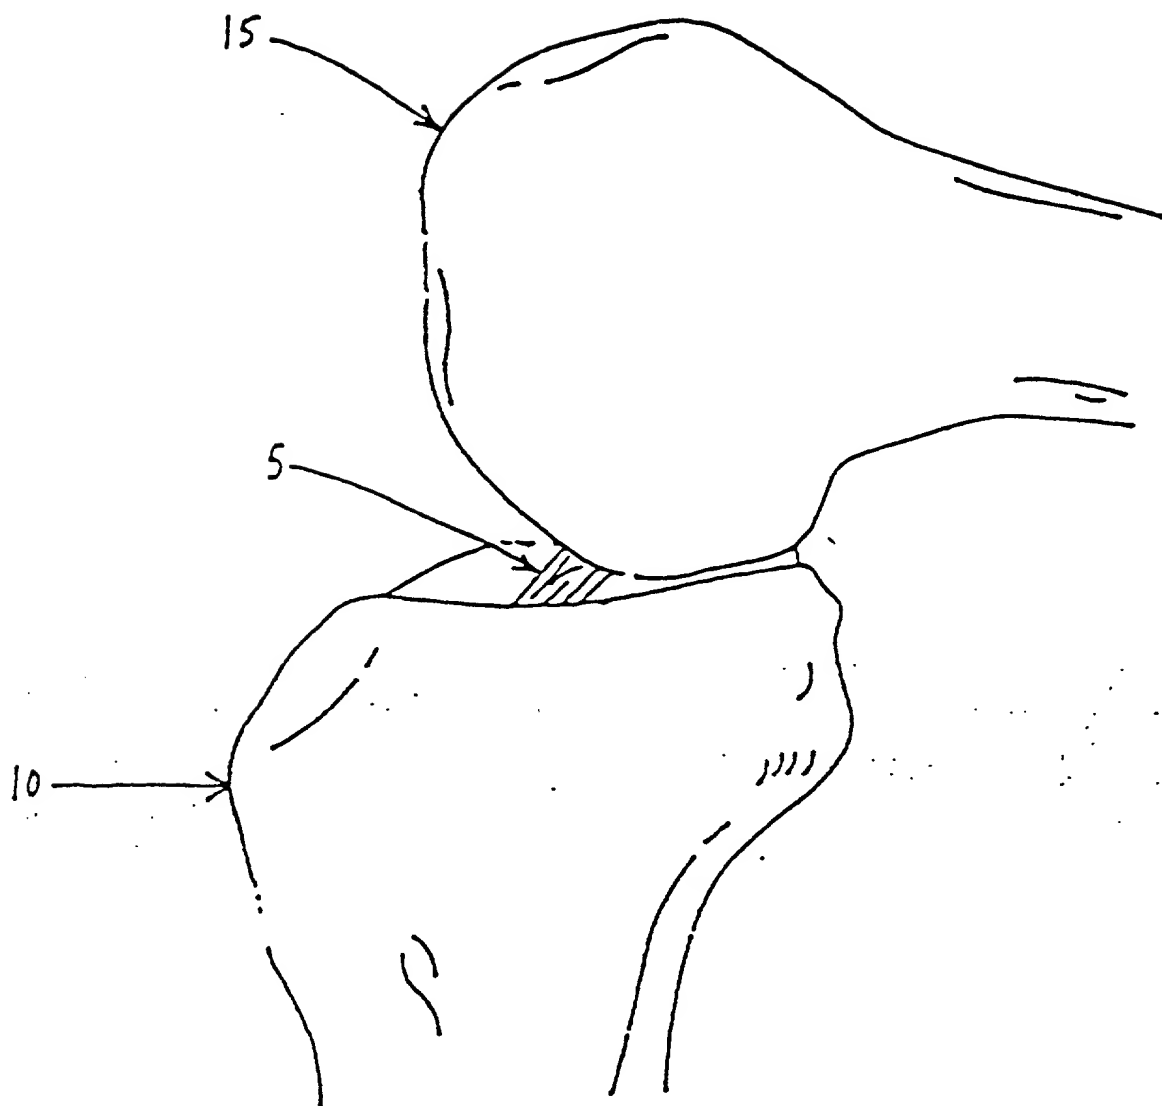


FIG. 1

FIG. 2

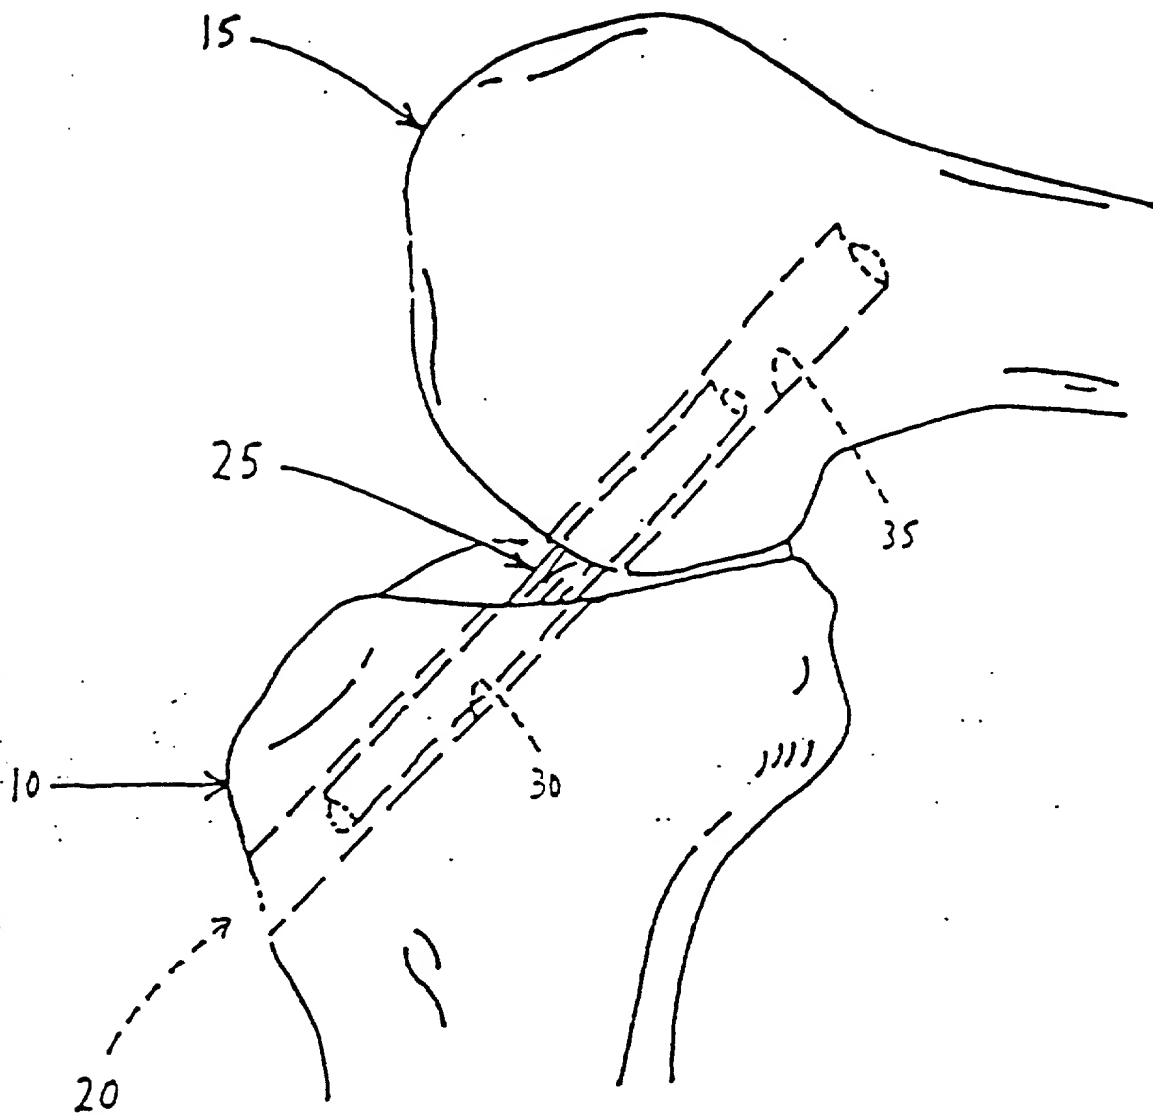


FIG. 2

FIG. 3

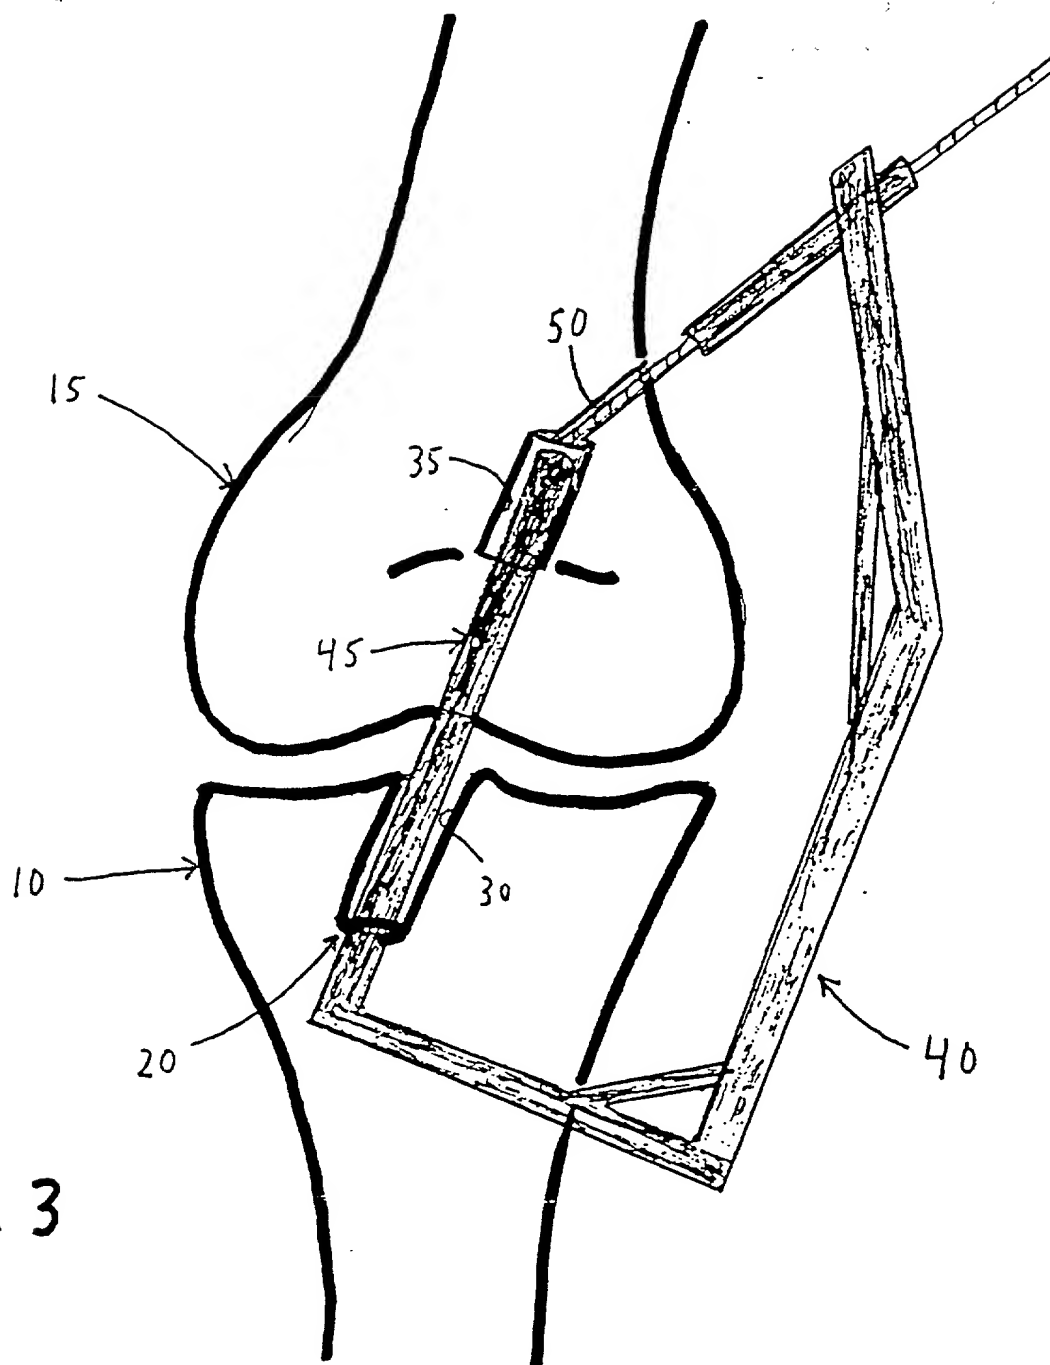


Figure 4 is a perspective view of the device 40. It shows the handle 45 and the head 46. The handle 45 is a long, thin, rectangular member. The head 46 is a larger, more complex structure at one end of the handle. The head 46 has a central opening and a smaller opening on the side. The device 40 is shown in a perspective view, with the handle 45 extending towards the bottom right and the head 46 towards the top left.

FIG. 4

FIG. 5

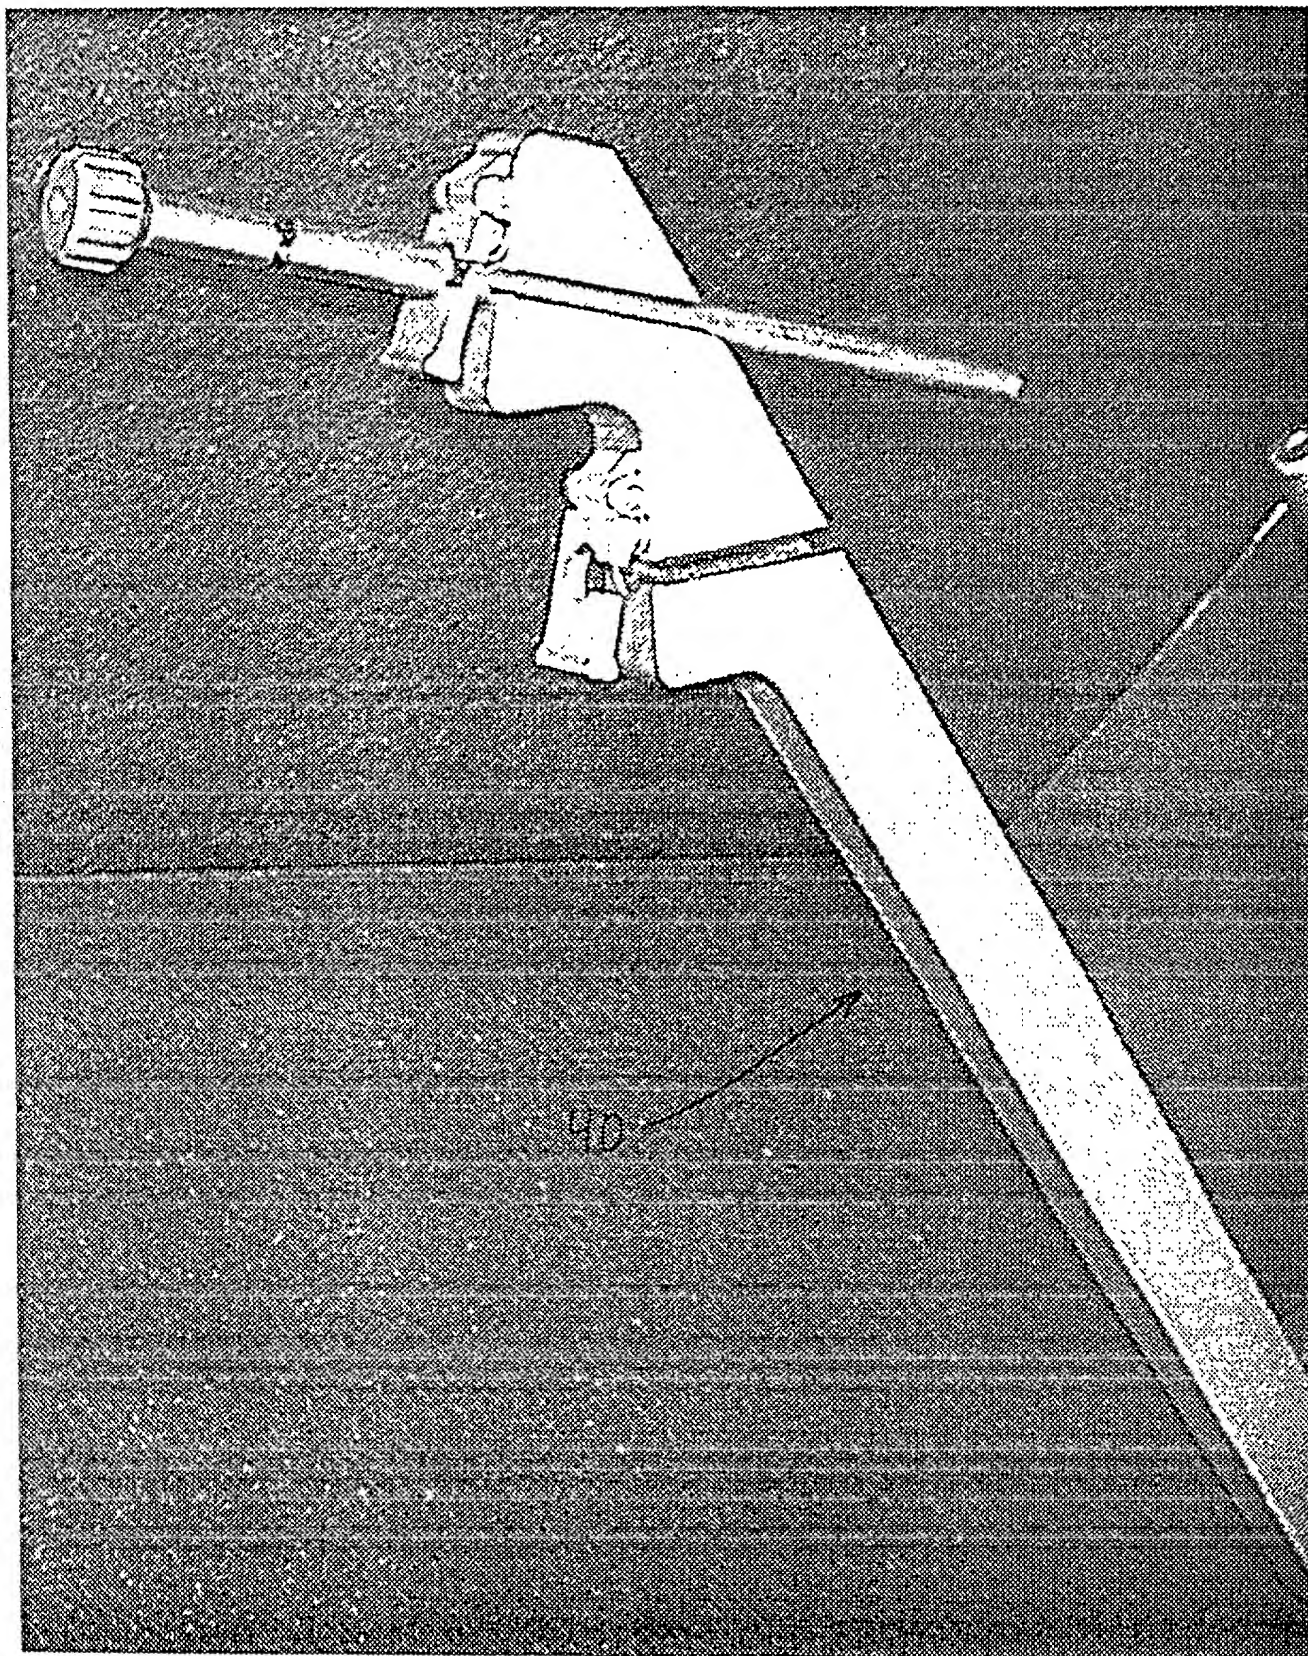


FIG. 5



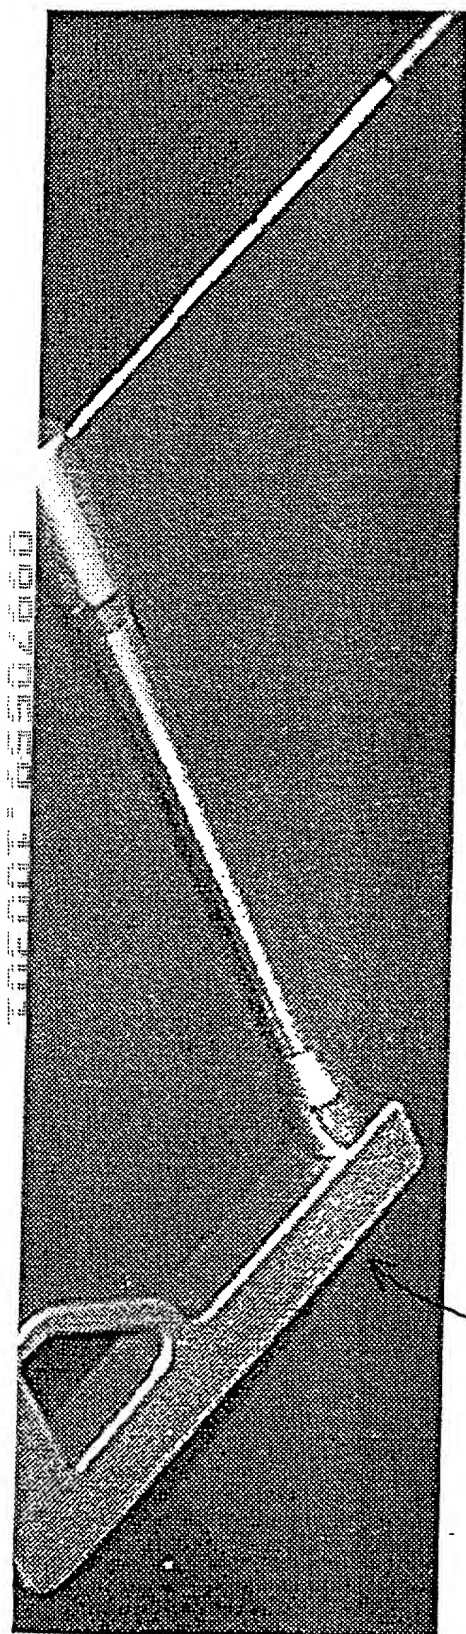


FIG. 6

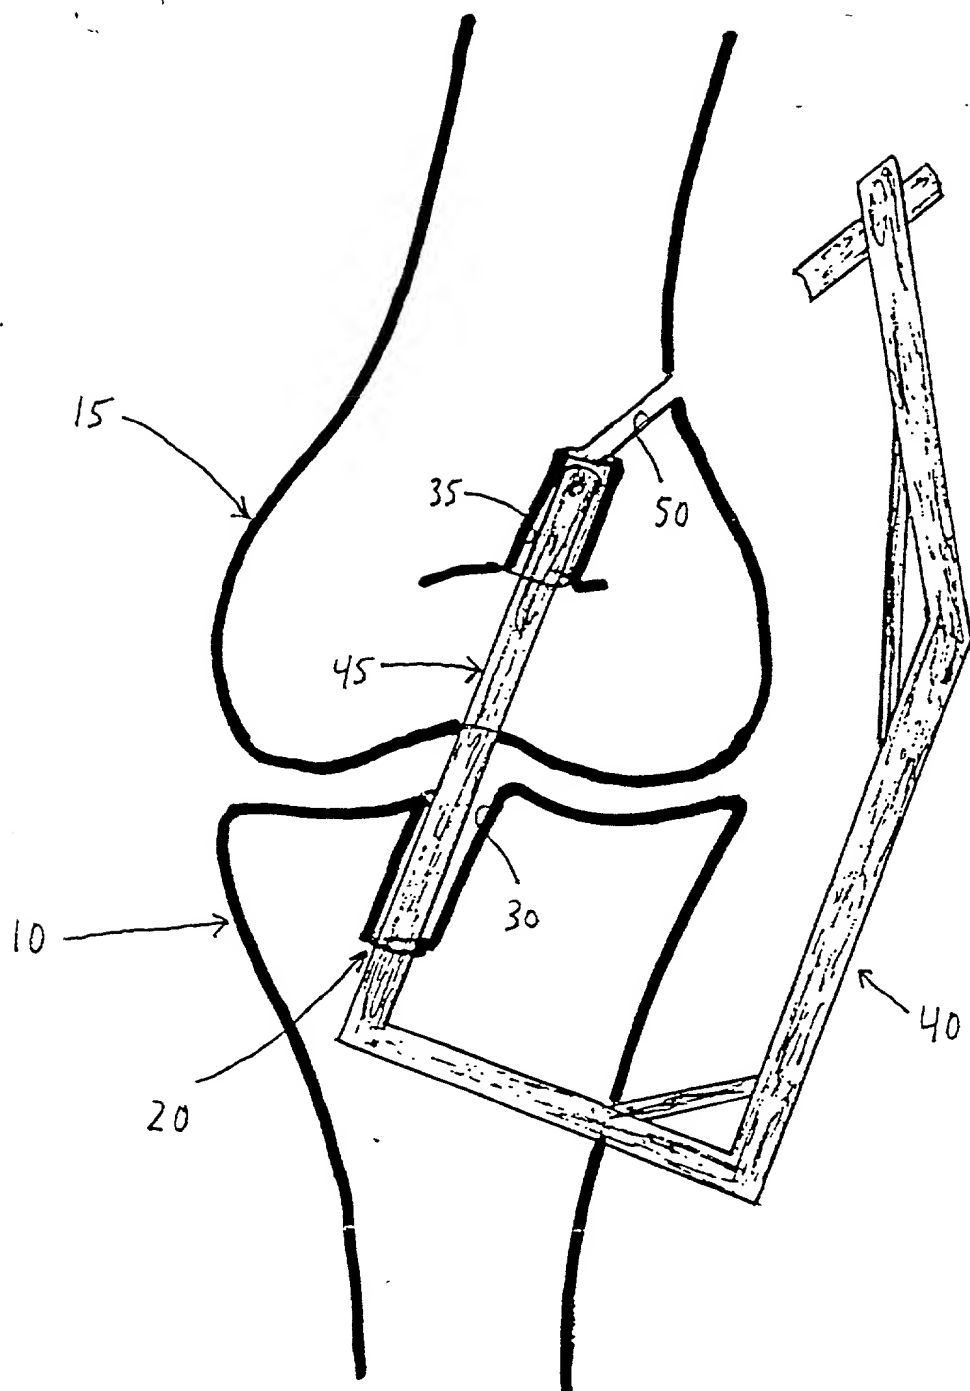
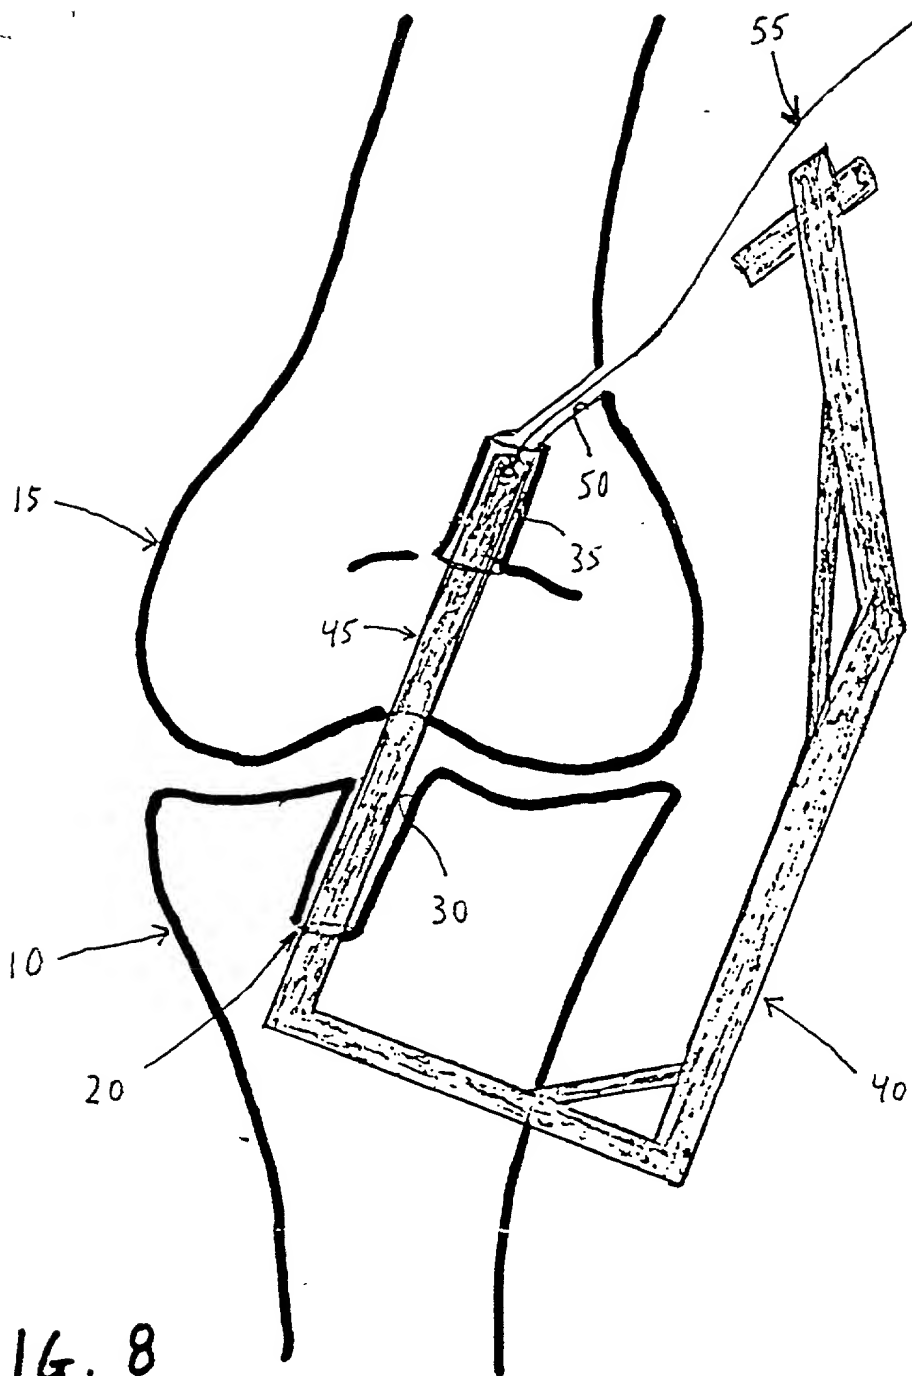


FIG. 7

FIG. 8





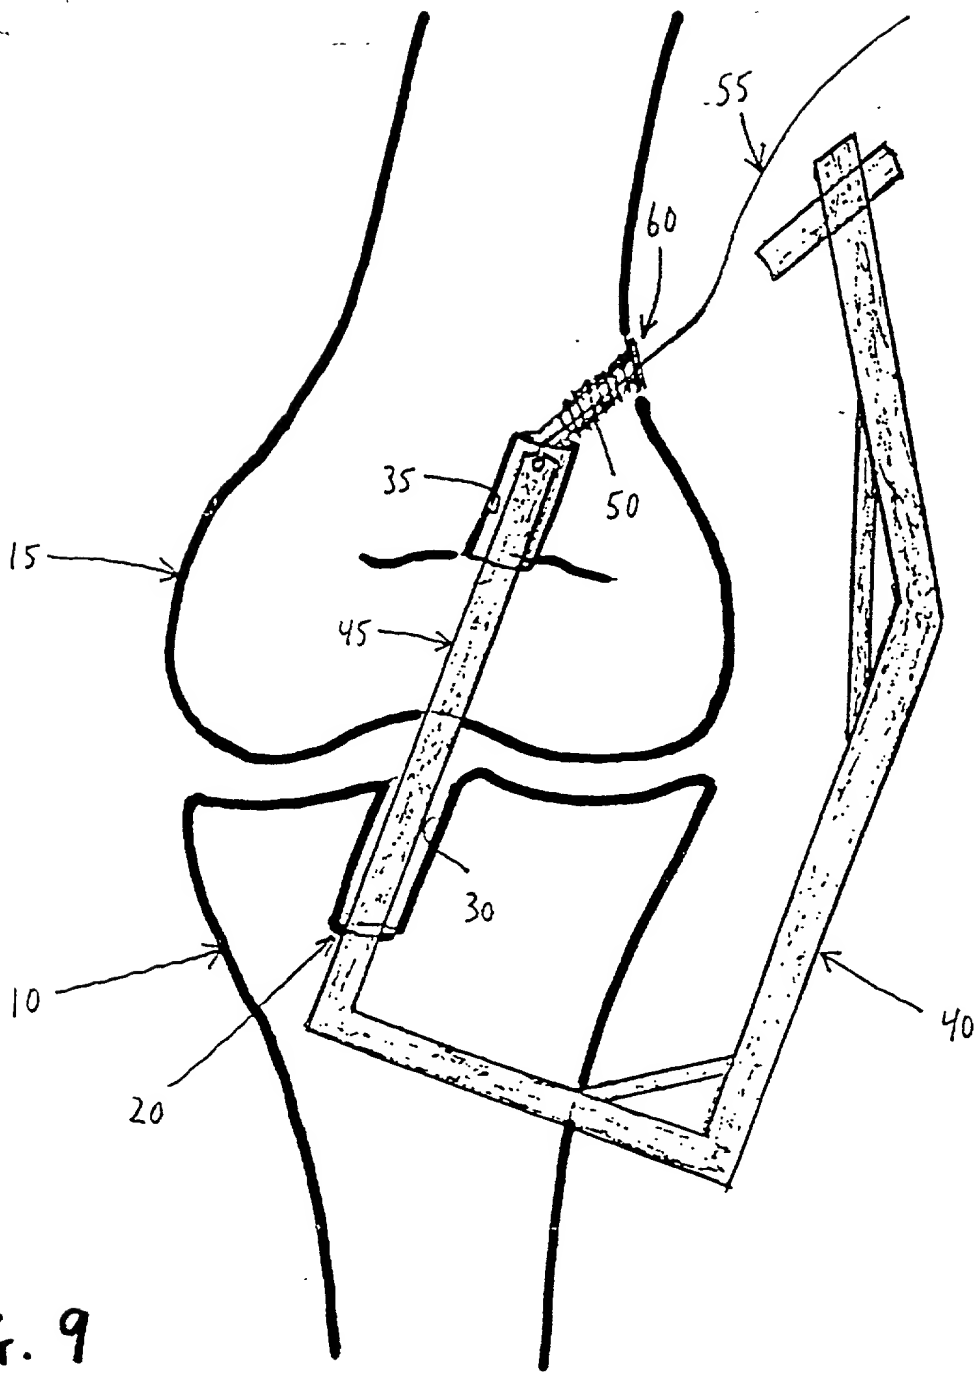


FIG. 9

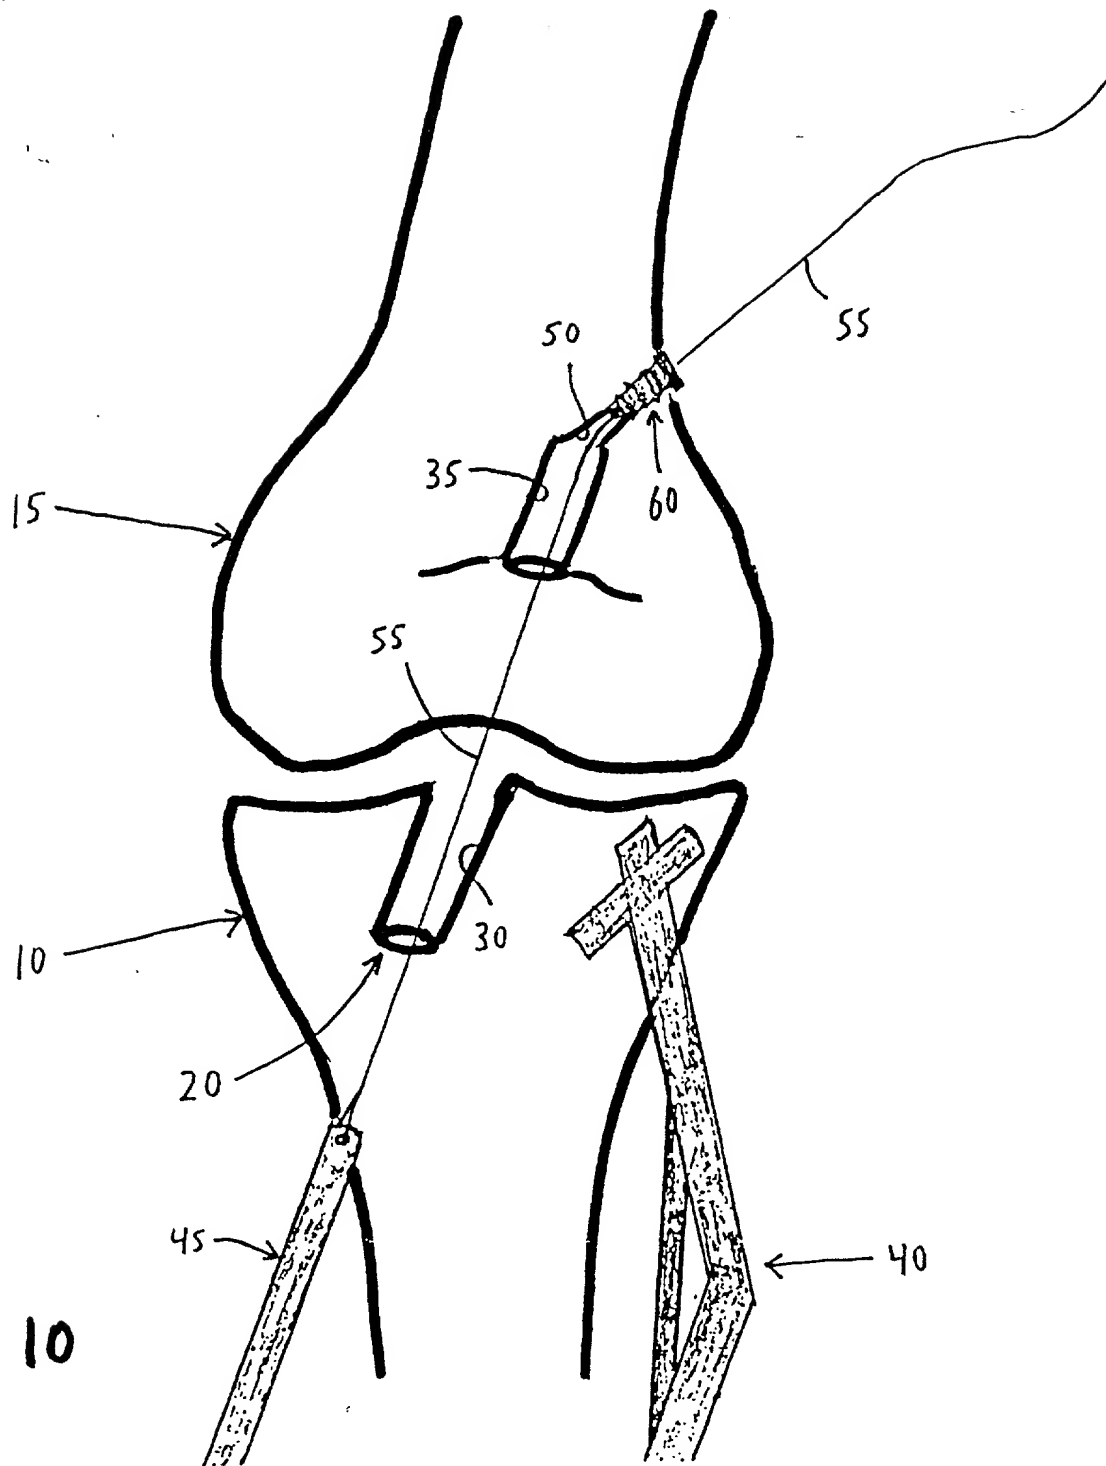
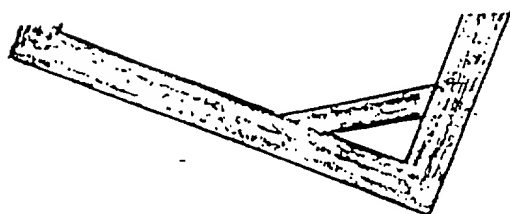
[illegible]

FIG. 10



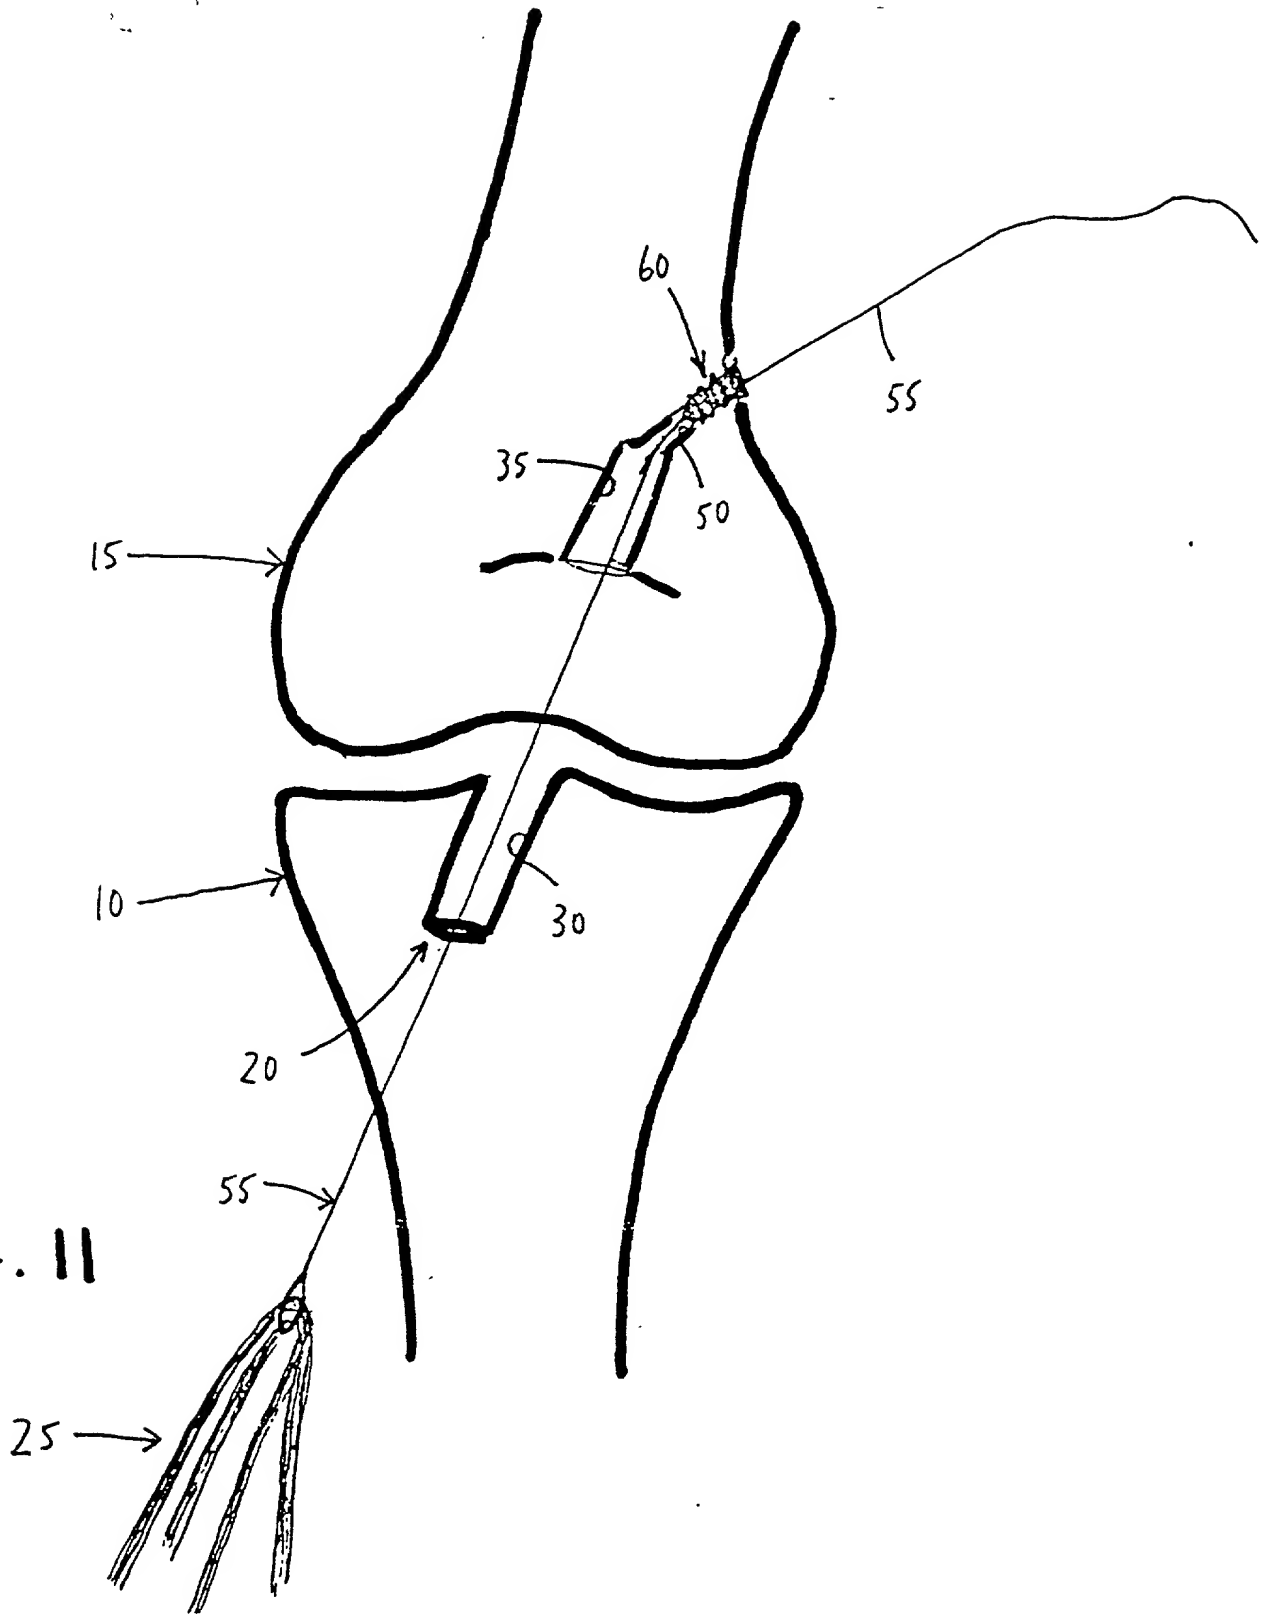


FIG. 11

FIG. 11

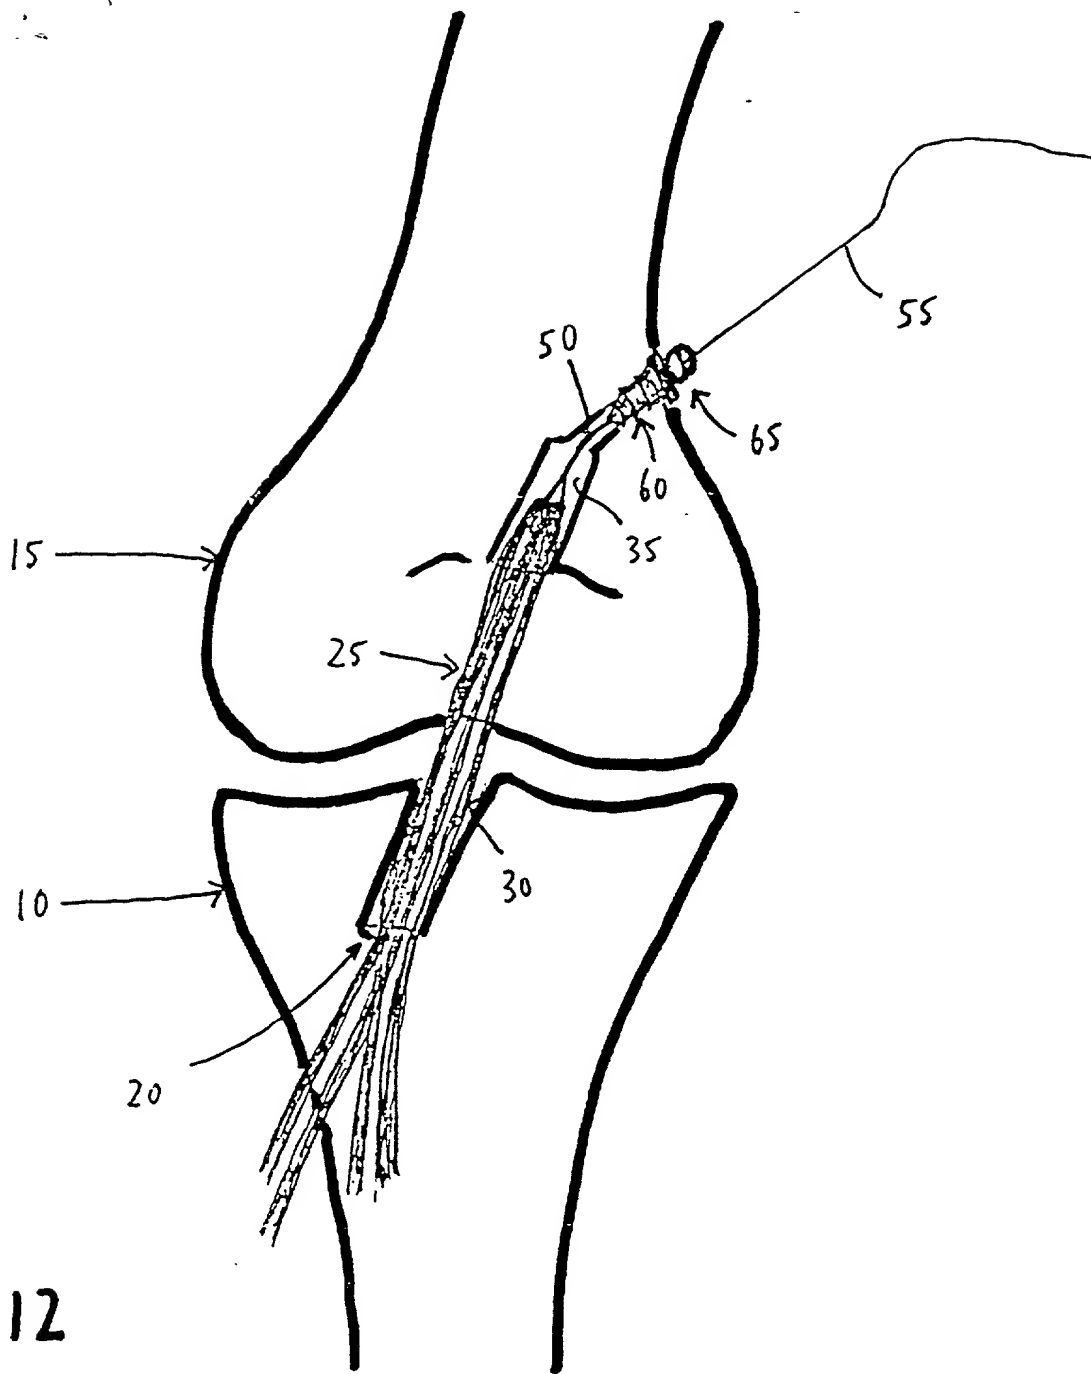


FIG. 12

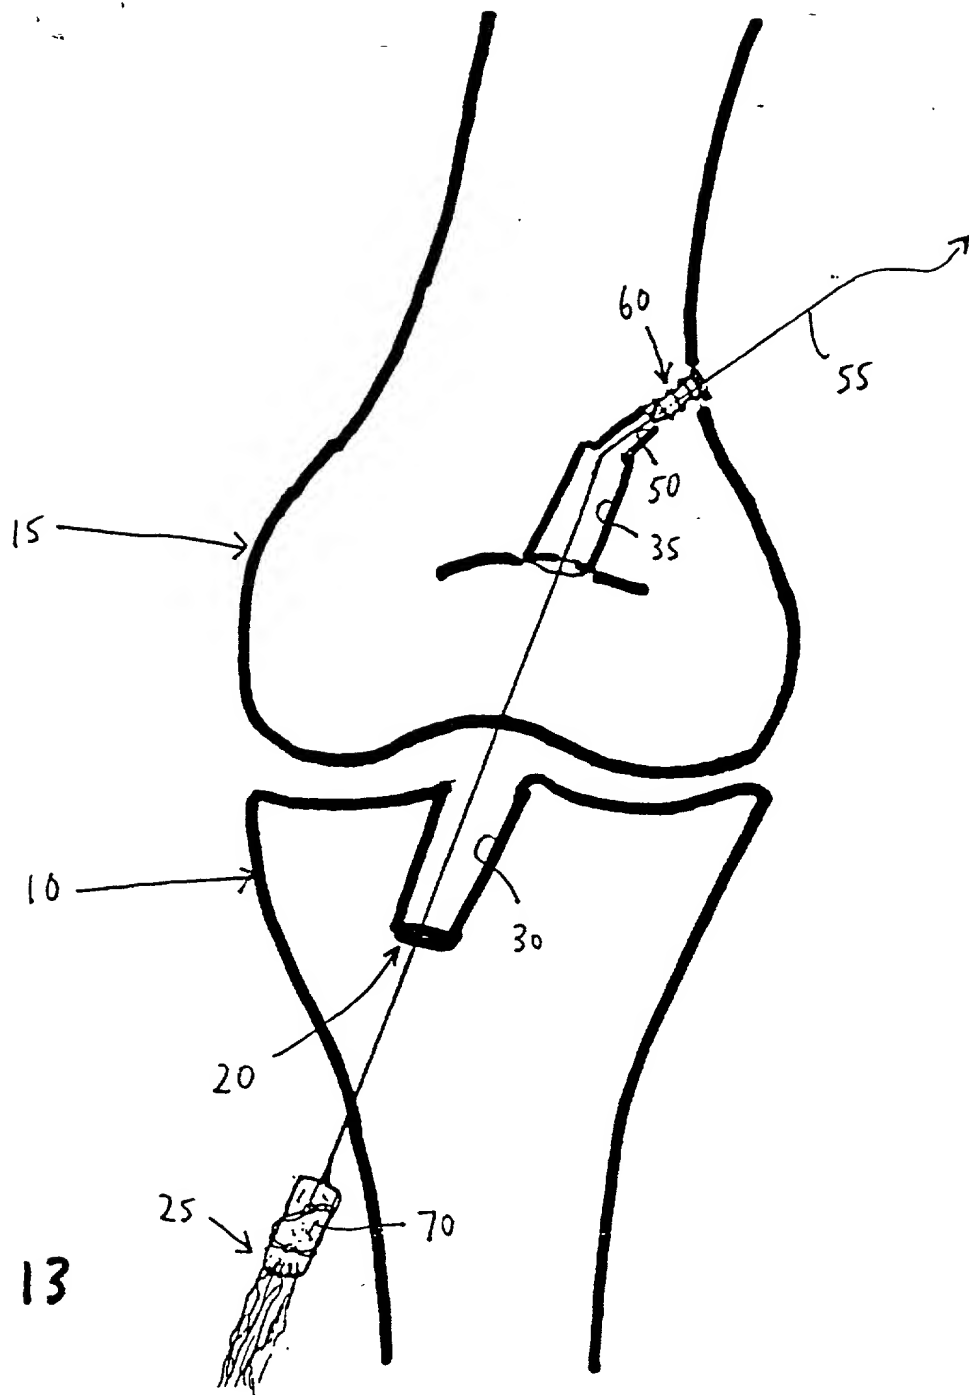


FIG. 13

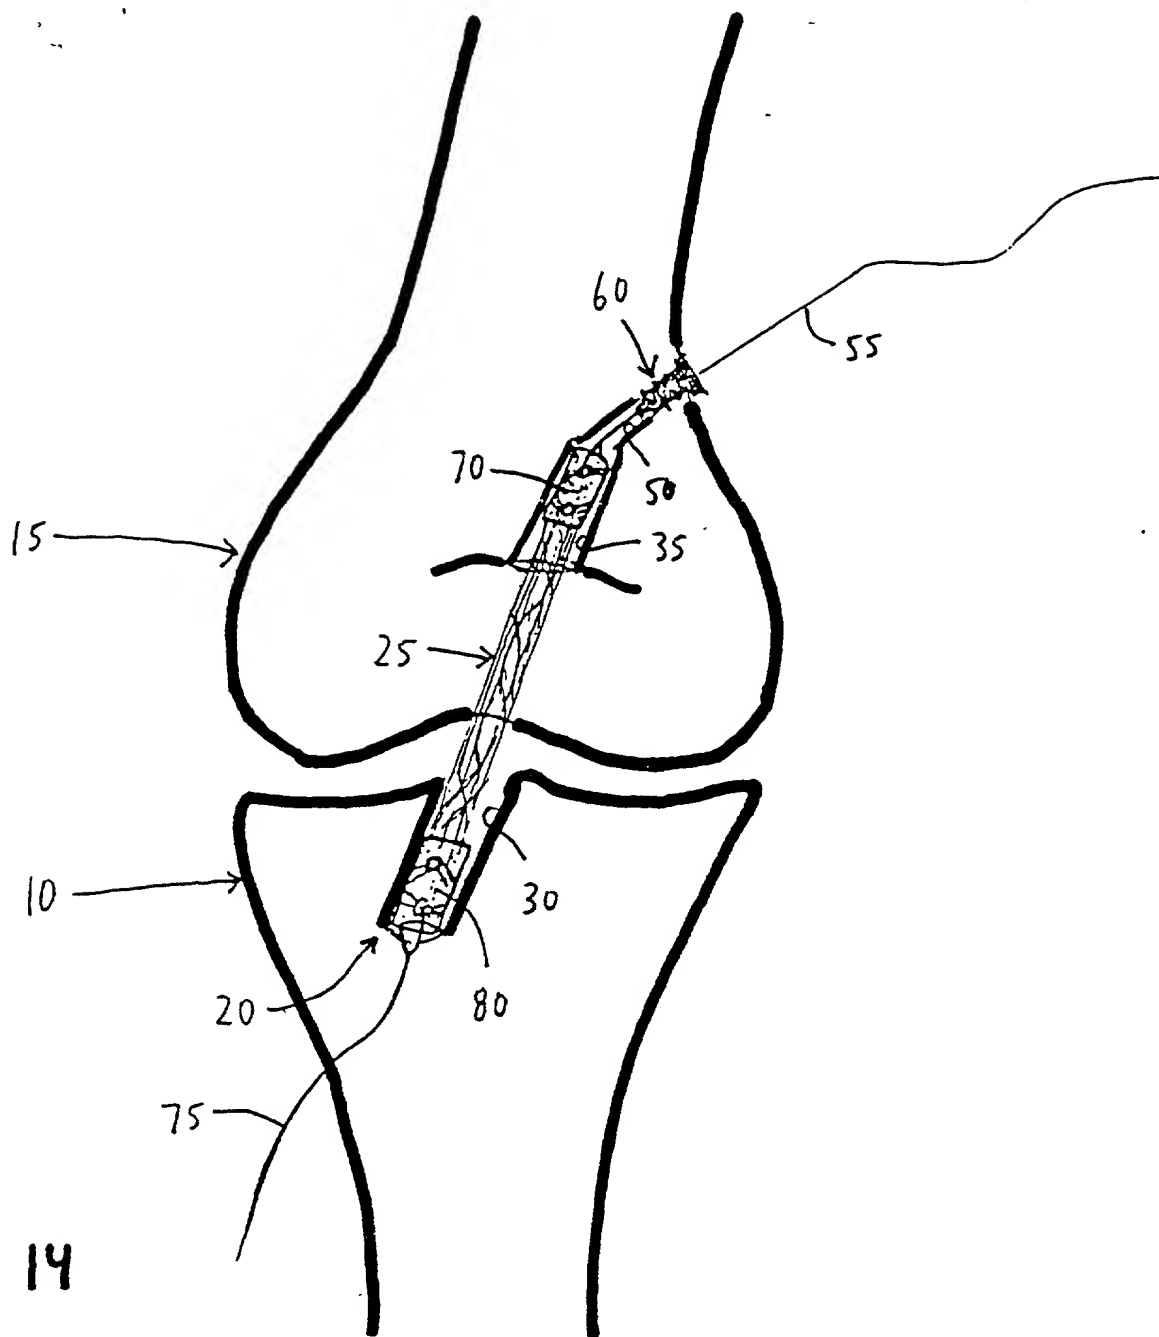


FIG. 14

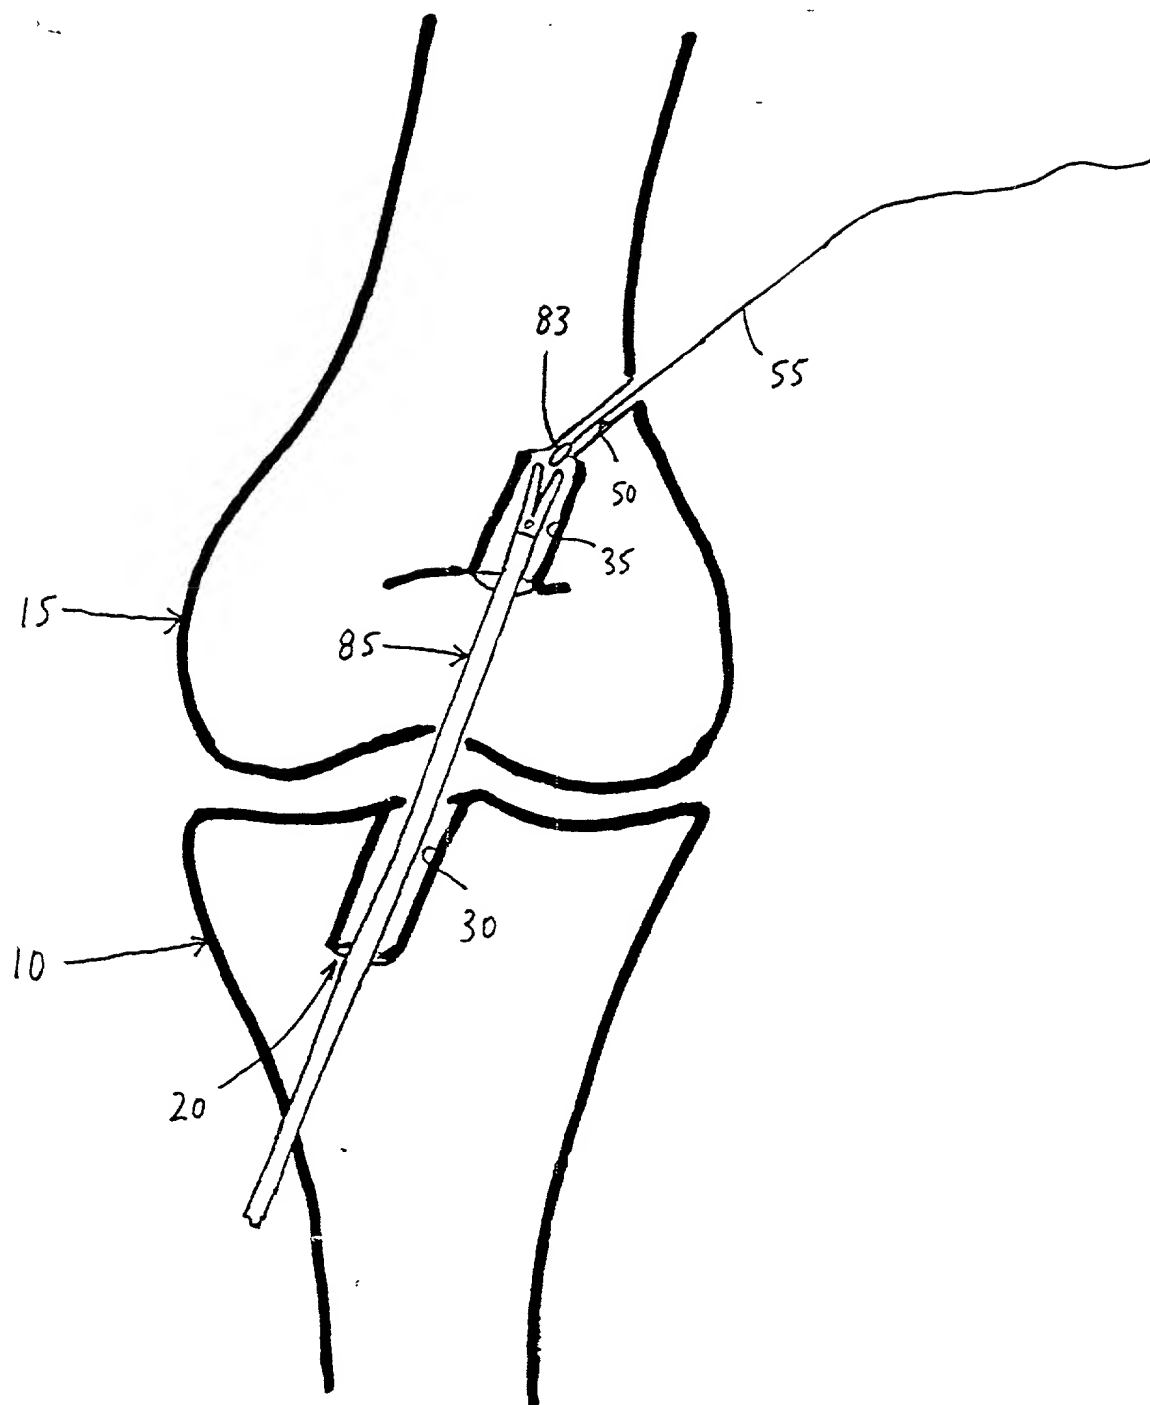


FIG. 15



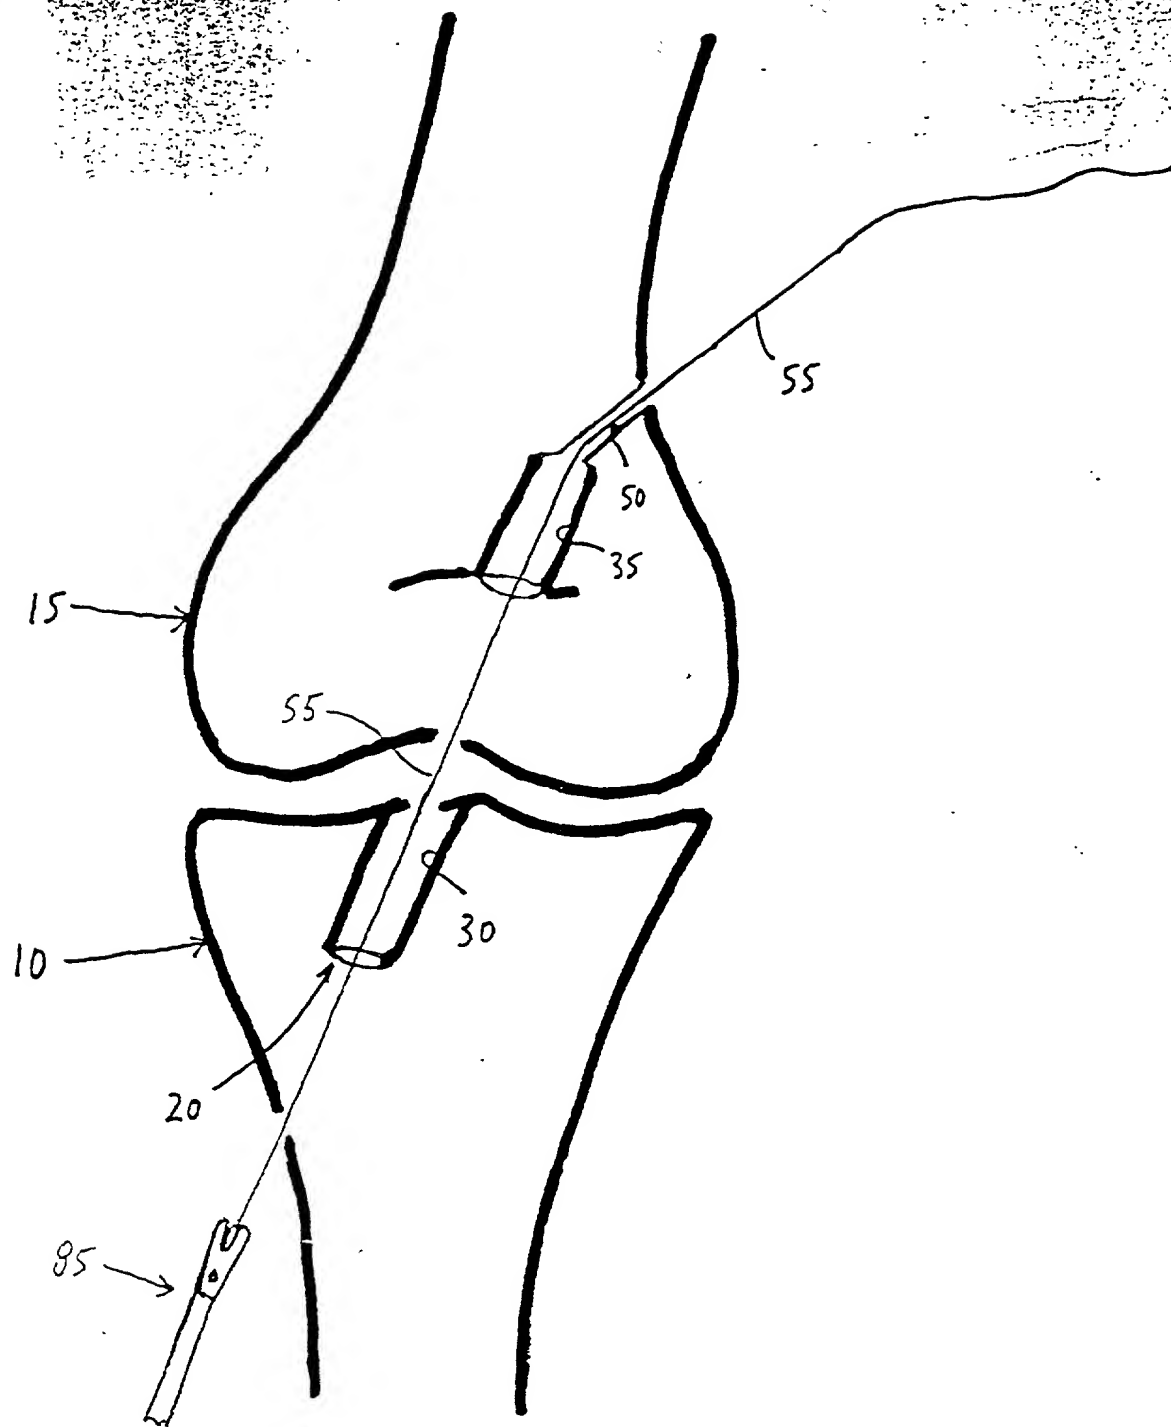


FIG. 16

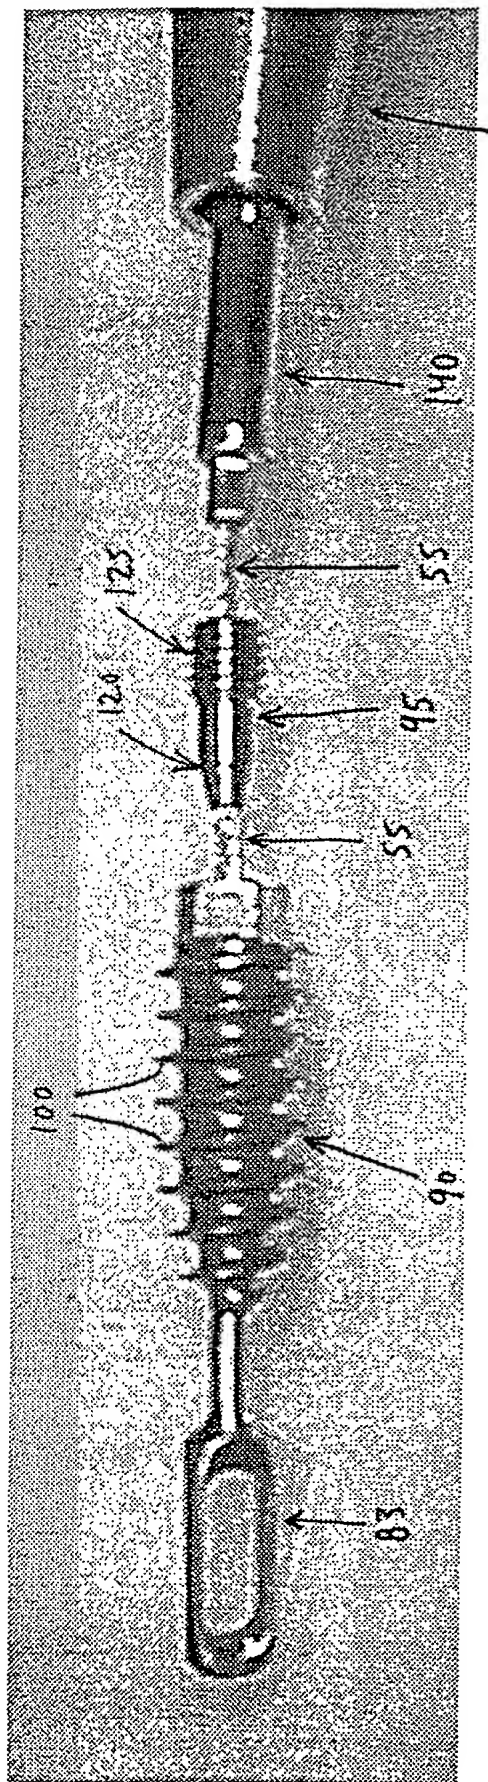


FIG. 17

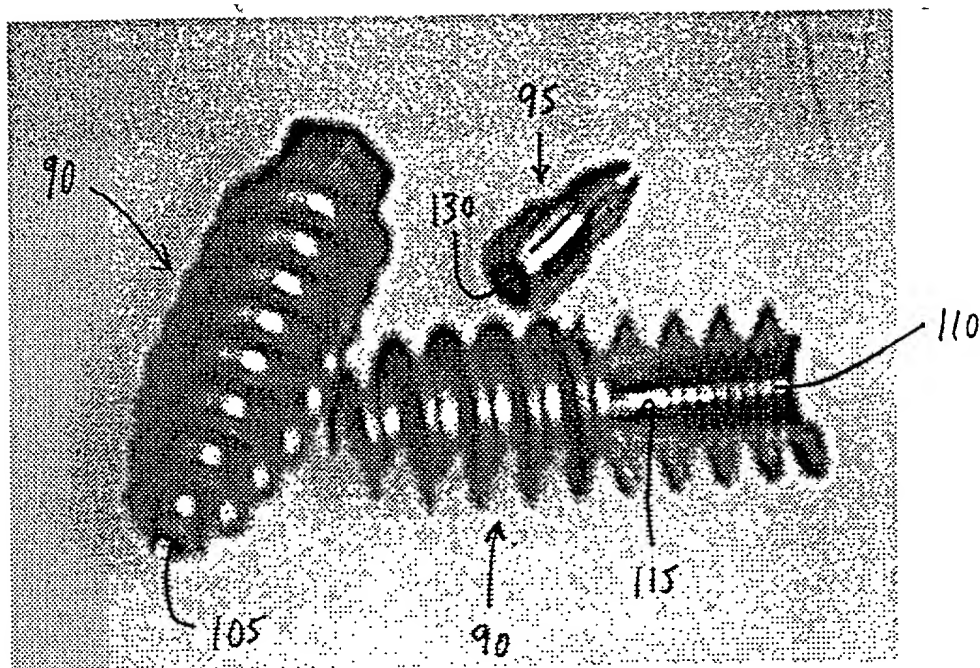


FIG. 18

00970559-100304  
FIG. 18

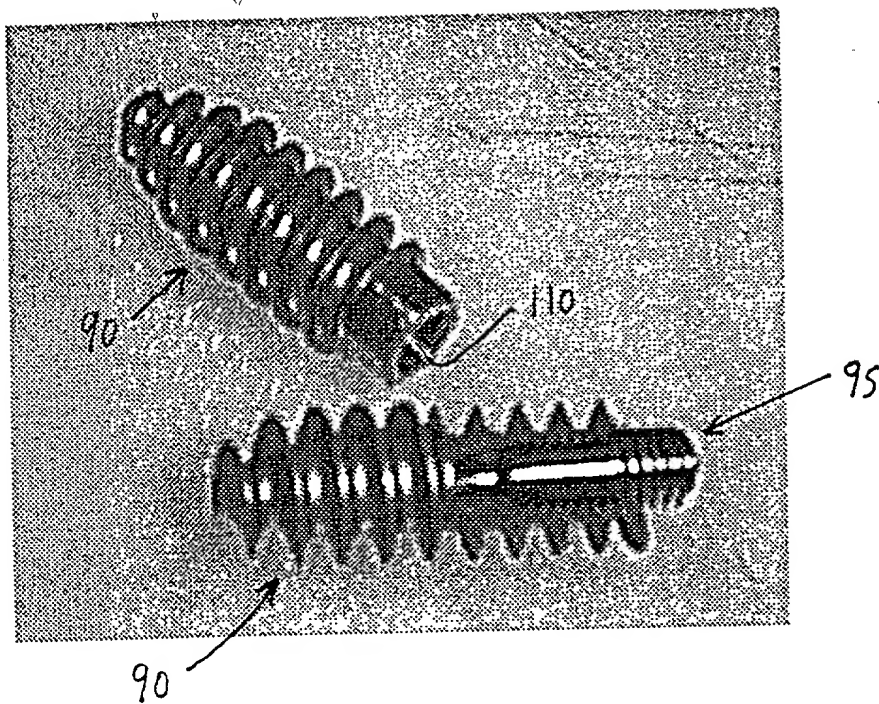


FIG. 19

T0600T-05506000

FIG. 20

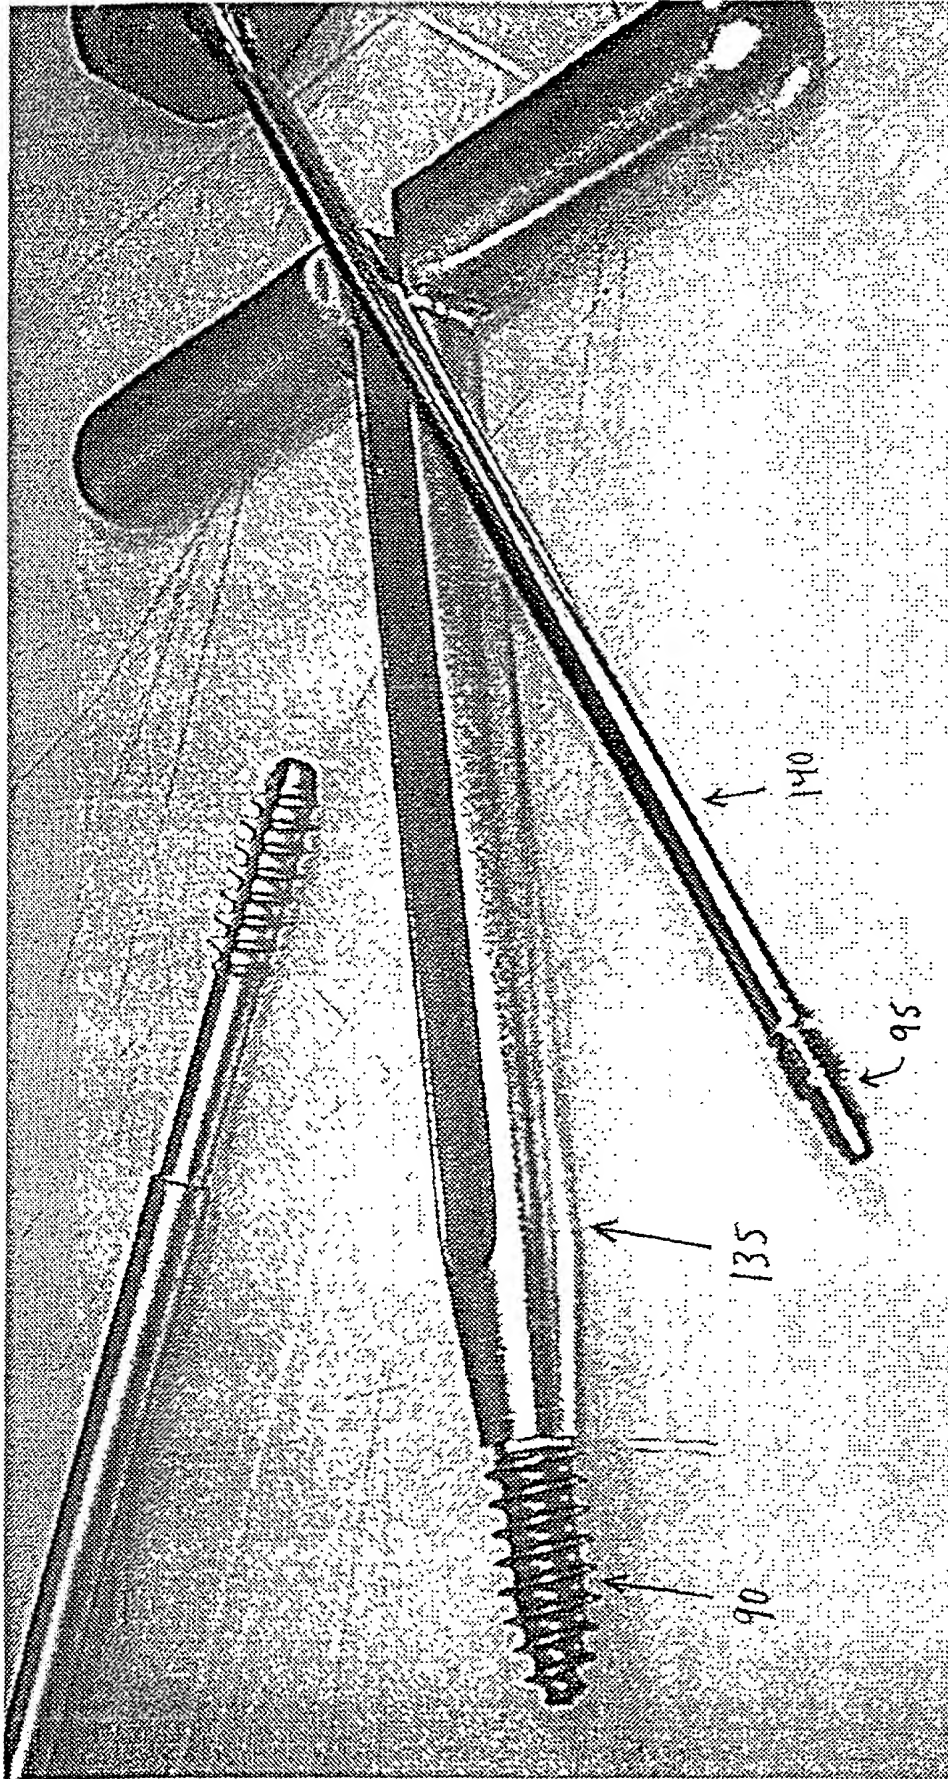


FIG. 20

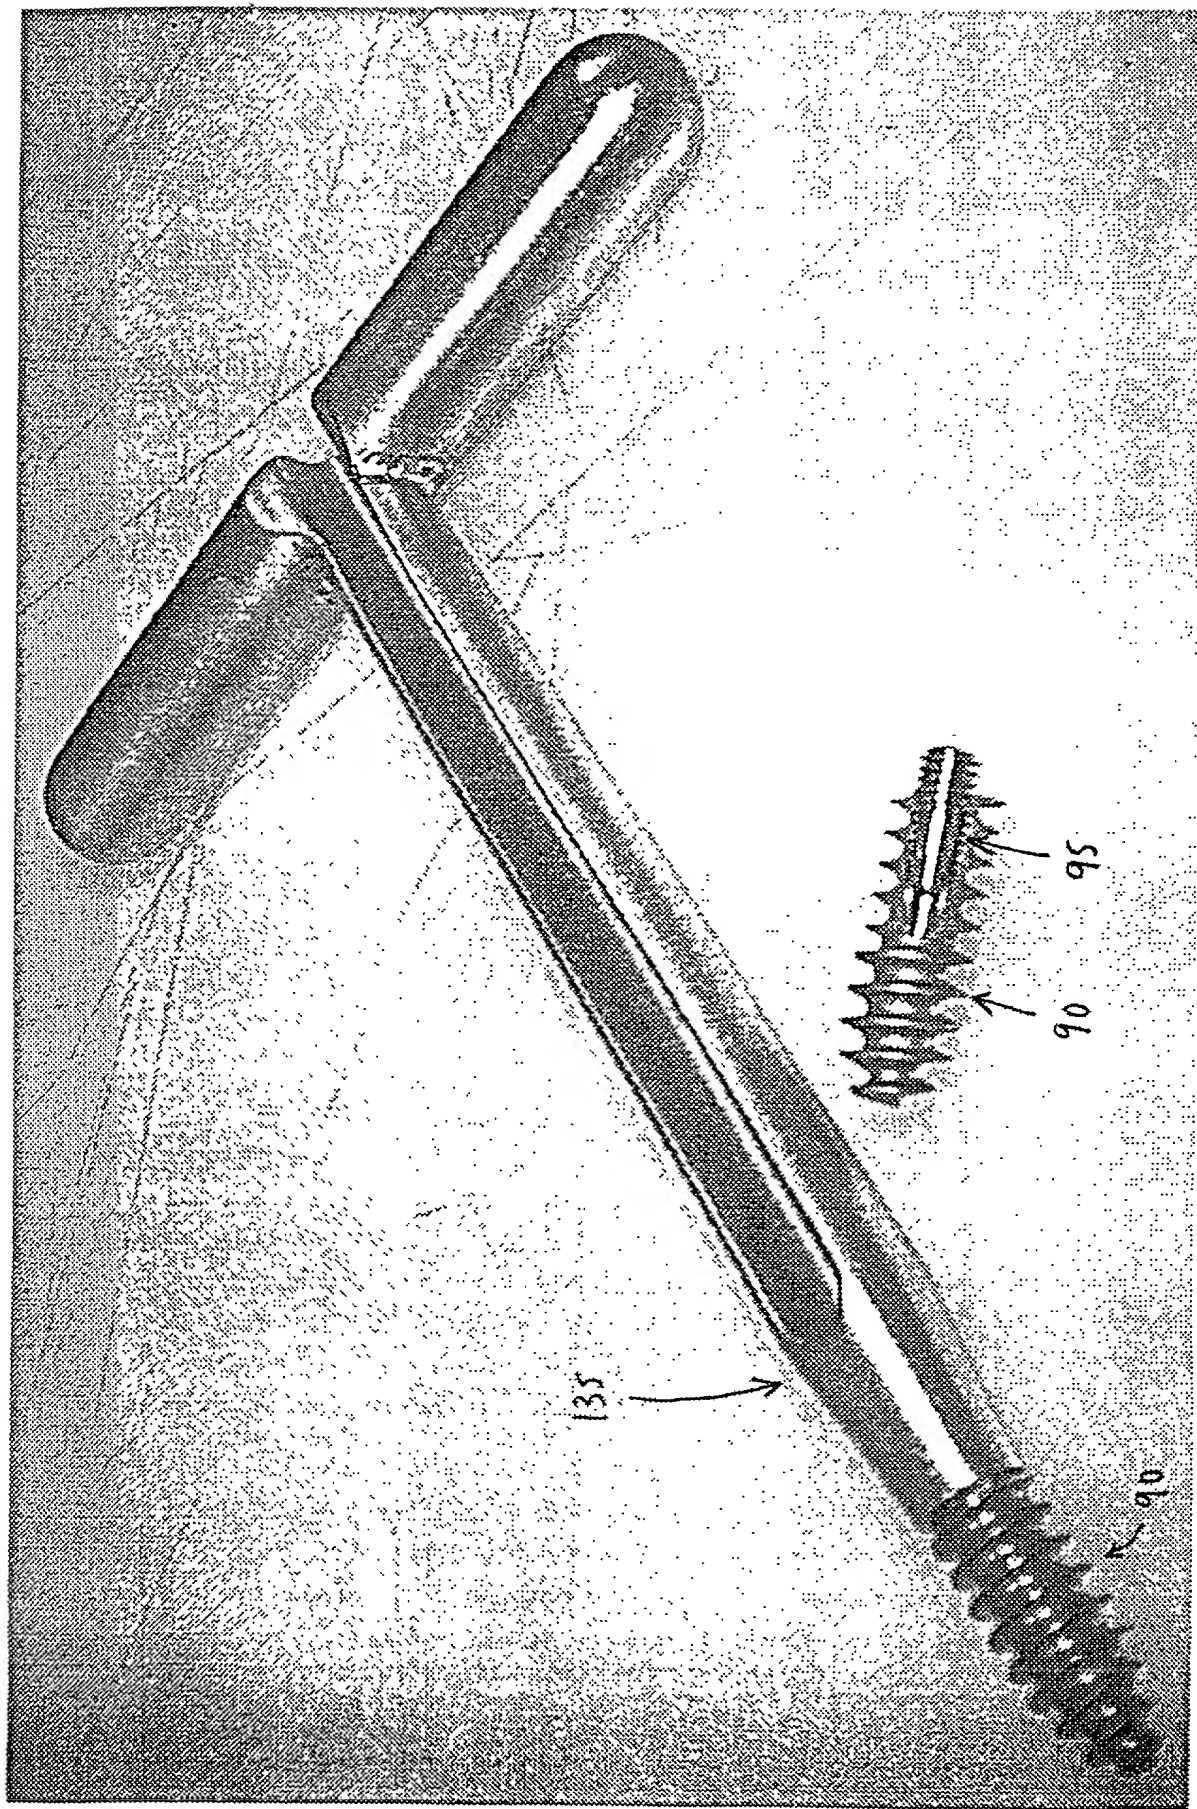


FIG. 21